



Summit Hot Water Duct Coils

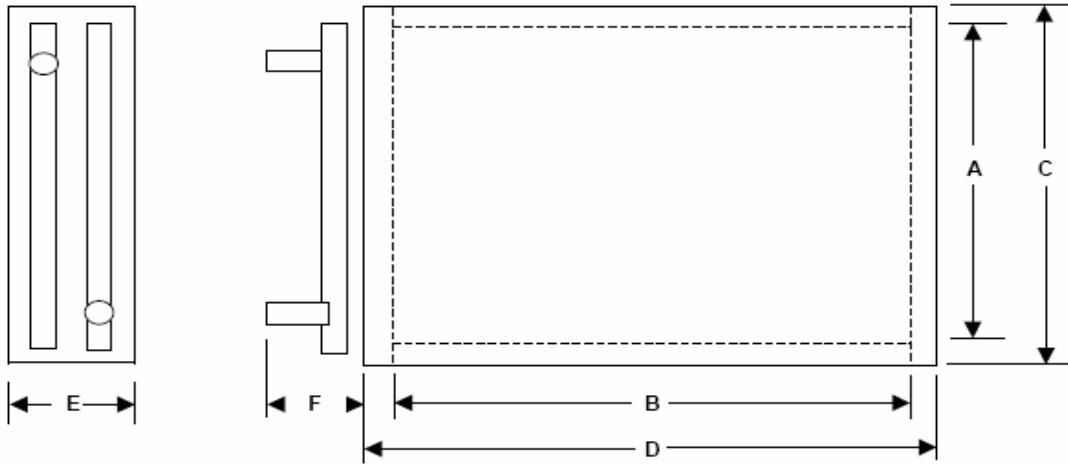


Model Number (includes # of Rows)	Face Area Sq-Ft	Finned Surface Area		Overall Frame Size		Frame Width E	Stub Out Length F	Header O.D. Sweat	Performance Based on 65°F EAT, 180°F EWT			
		A	B	C	D				GPM	CFM	BTU's	APD
CCDC0712-1	0.63	7.5	12	9.5	14	3 3/4	4 1/2	7/8	4	300	10,300	0.07
									4	400	11,900	0.11
									4	500	13,000	0.17
CCDC1212-1	1.04	12.5	12	14.5	14	3 3/4	4 1/2	7/8	4	600	15,500	0.07
									4	700	17,700	0.12
									4	800	18,700	0.16
CCDC1215-1	1.30	12.5	15	14.5	17	3 3/4	4 1/2	7/8	4	600	18,800	0.06
									4	700	20,115	0.08
									4	800	21,234	0.10
CCDC1218-1	1.56	12.5	18	14.5	20	3 3/4	4 1/2	7/8	4	900	24,500	0.09
									4	1000	25,620	0.11
									4	1100	26,560	0.13
CCDC1224-1	2.08	12.5	24	14.5	26	3 3/4	4 1/2	7/8	4	1400	34,065	0.12
									4	1500	34,930	0.14
									4	1600	25,735	0.16
CCDC1515-1	1.56	15	15	17	17	3 3/4	4 1/2	7/8	4	1000	24,460	0.11
									4	1100	25,311	0.13
									4	1200	26,085	0.16
CCDC1520-1	2.08	15	20	17	22	3 3/4	4 1/2	7/8	4	1300	31,690	0.11
									4	1400	32,520	0.12
									4	1500	33,309	0.14
CCDC1524-1	2.50	15	24	17	26	3 3/4	4 1/2	7/8	4	1600	37,750	0.11
									4	1700	38,556	0.13
									4	1800	39,310	0.14
CCDC1530-1	3.13	15	30	17	32	3 3/4	4 1/2	7/8	4	2000	46,089	0.11
									4	2100	46,859	0.12
									4	2200	47,589	0.13
CCDC1536-1	3.75	15	36	17	38	3 3/4	4 1/2	7/8	4	2500	54,770	0.12
									4	2600	55,470	0.13
									4	2700	56,144	0.14
CCDC1718-1	2.19	17.5	18	19.5	20	3 3/4	4 1/2	7/8	4	1400	32,056	0.11
									4	1500	32,810	0.13
									4	1600	33,510	0.14

Summit Hot Water Duct Coils

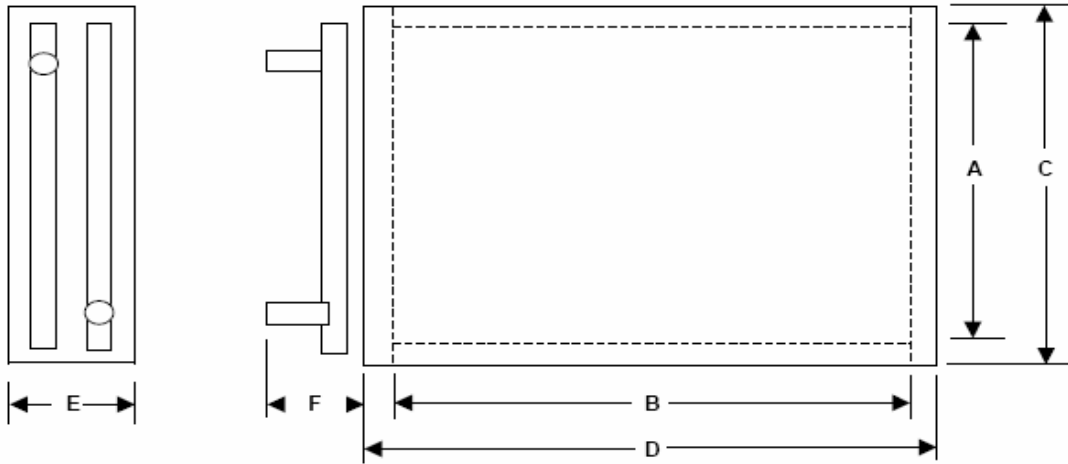


Model Number (includes # of Rows)	Face Area Sq-Ft	Finned Surface Area		Overall Frame Size		Frame Width E	Stub Out Length F	Header O.D. Sweat	Performance Based on 65°F EAT, 180°F EWT			
		A	B	C	D				GPM	CFM	BTU's	APD
CCDC1724-1	2.92	17.5	24	19.5	26	3 3/4	4 1/2	7/8	4	1900	41,863	0.12
									4	2000	42,568	0.13
									4	2100	43,233	0.14
CCDC1730-1	3.65	17.5	30	19.5	32	3 3/4	4 1/2	7/8	4	2400	51,134	0.12
									4	2500	51,796	0.13
									4	2700	53,033	0.15
CCDC1736-1	4.38	17.5	36	19.5	38	3 3/4	5 1/4	1 1/8	4	2800	59,256	0.11
									4	3000	60,529	0.13
									4	3200	61,706	0.14
CCDC1742-1	5.10	17.5	42	19.5	44	3 3/4	5 1/4	1 1/8	4	3500	68,791	0.13
									4	3600	69,361	0.14
									4	3700	69,912	0.15
CCDC2036-1	5.00	20	36	22	38	3 3/4	5 1/4	1 1/8	4	3700	66,631	0.15
									4	3800	67,118	0.16
									4	4000	68,040	0.17
CCDC0712-2	0.63	7.5	12	9.5	14	3 3/4	4 1/2	7/8	4	300	17,621	0.13
										400	20,556	0.22
										500	22,928	0.32
CCDC1024-2	1.67	10	24	12	26	3 3/4	4 1/2	7/8	8	900	48,686	0.13
										1000	55,794	0.19
										1100	58,078	0.23
CCDC1212-2	1.04	12.5	12	14.5	14	3 3/4	4 1/2	7/8	8	600	33,511	0.18
										700	36,389	0.24
										800	38,949	0.30
CCDC1215-2	1.30	12.5	15	14.5	17	3 3/4	4 1/2	7/8	8	700	39,990	0.16
										800	42,994	0.20
										900	45,712	0.25
CCDC1218-2	1.56	12.5	18	14.5	20	3 3/4	4 1/2	7/8	8	900	49,413	0.18
										1000	52,233	0.22
										1100	54,829	0.26
CCDC1224-2	2.08	12.5	24	14.5	26	3 3/4	4 1/2	7/8	8	1000	58,675	0.13
										1200	64,763	0.18
										1400	70,067	0.24

Summit Hot Water Duct Coils

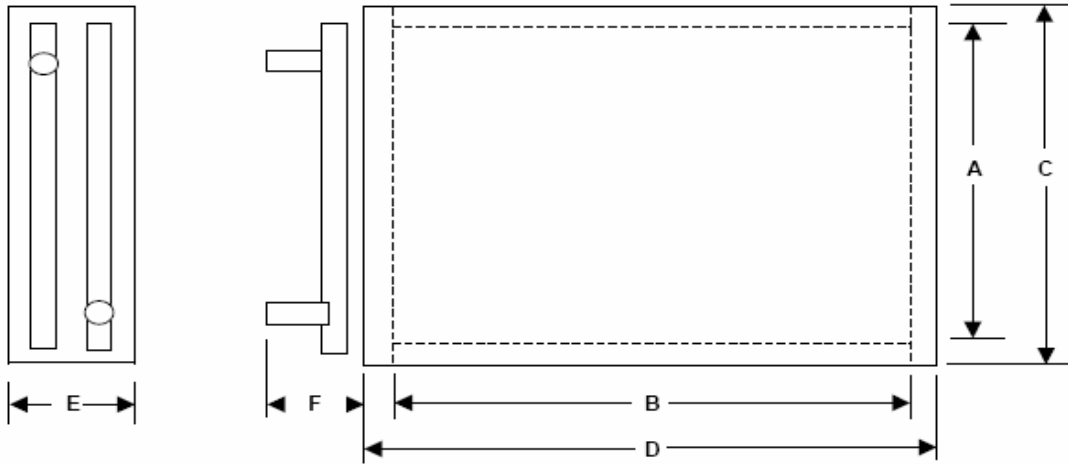


Model Number (includes # of Rows)	Face Area Sq-Ft	Finned Surface Area		Overall Frame Size		Frame Width E	Stub Out Length F	Header O.D. Sweat	Performance Based on 65°F EAT, 180°F EWT			
		A	B	C	D				GPM	CFM	BTU's	APD
CCDC1236-2	3.13	12.5	36	14.5	38	3 3/4	4 1/2	7/8	8	1200	75,390	0.08
										1400	82,246	0.11
										1600	88,363	0.14
CCDC1515-2	1.56	15	15	17	17	3 3/4	4 1/2	7/8	8	800	45,236	0.14
										900	48,165	0.18
										1000	50,835	0.22
CCDC1518-2	1.88	15	18	17	20	3 3/4	4 1/2	7/8	8	1000	54,962	0.16
										1100	57,757	0.18
										1200	60,346	0.22
CCDC1520-2	2.08	15	20	17	22	3 3/4	4 1/2	7/8	8	1200	63,145	0.18
										1300	65,742	0.21
										1400	68,169	0.24
CCDC1524-2	2.50	15	24	17	26	3 3/4	4 1/2	7/8	8	1400	73,706	0.17
										1500	76,296	0.19
										1600	78,739	0.22
CCDC1530-2	3.13	15	30	17	32	3 3/4	4 1/2	7/8	8	1600	86,339	0.14
										1800	91,583	0.18
										2000	96,324	0.22
CCDC1536-2	3.75	15	36	17	38	3 3/4	4 1/2	7/8	8	2000	103,776	0.16
										2300	110,931	0.20
										2600	117,258	0.25
CCDC1718-2	2.19	17.5	18	19.5	20	3 3/4	4 1/2	7/8	8	1200	62,967	0.16
										1300	65,526	0.19
										1400	67,714	0.22
CCDC1724-2	2.92	17.5	24	19.5	26	3 3/4	5 1/4	1 1/8	8	1500	79,502	0.15
										1700	84,542	0.18
										1900	89,062	0.22
CCDC1730-2	3.65	17.5	30	19.5	32	3 3/4	5 1/4	1 1/8	8	2000	100,337	0.16
										2200	104,909	0.19
										2400	109,091	0.23

Summit Hot Water Duct Coils

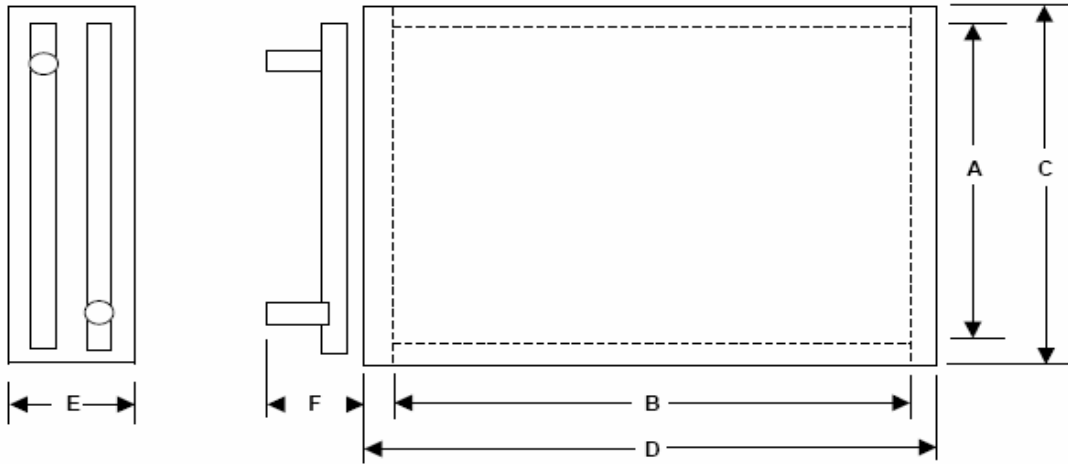


Model Number (includes # of Rows)	Face Area Sq-Ft	Finned Surface Area		Overall Frame Size		Frame Width E	Stub Out Length F	Header O.D. Sweat	Performance Based on 65°F EAT, 180°F EWT			
		A	B	C	D				GPM	CFM	BTU's	APD
CCDC1736-2	4.38	17.5	36	19.5	38	3 3/4	5 1/4	1 1/8	10	2500	127,396	0.18
										2700	132,194	0.20
										2900	136,676	0.23
CCDC1742-2	5.10	17.5	42	19.5	44	3 3/4	5 1/4	1 1/8	10	2500	135,219	0.13
										2700	140,511	0.15
										2900	145,456	0.17
CCDC2020-2	2.78	20	20	22	22	3 3/4	4 1/2	7/8	8	1600	78,637	0.18
										1700	80,894	0.20
										1800	83,031	0.22
CCDC2025-2	3.47	20	25	22	27	3 3/4	4 1/2	7/8	8	1900	93,927	0.16
										2100	98,348	0.20
										2300	102,378	0.23
CCDC2030-2	4.17	20	30	22	32	3 3/4	5 1/4	1 1/8	10	2400	120,153	0.18
										2600	124,781	0.21
										2800	129,087	0.24
CCDC2036-2	5.00	20	36	22	38	3 3/4	5 1/4	1 1/8	10	2800	139,282	0.17
										3000	143,825	0.19
										3200	148,089	0.22
CCDC1215-3	1.30	12.5	15	14.5	17	3 3/4	4 1/2	7/8	8	500	41,773	0.13
										600	47,130	0.18
										700	51,926	0.23
CCDC1520-3	2.08	15	20	17	22	3 3/4	4 1/2	7/8	8	800	64,472	0.13
										950	69,474	0.16
										1100	74,092	0.19
CCDC2020-3	2.78	20	20	22	22	3 3/4	4 1/2	7/8	8	1000	78,719	0.11
										1200	87,836	0.16
										1400	95,800	0.21
CCDC2025-3	3.47	20	25	22	27	3 3/4	4 1/2	7/8	8	1600	111,541	0.18
										1700	115,255	0.20
										1800	118,779	0.22

Summit Hot Water Duct Coils

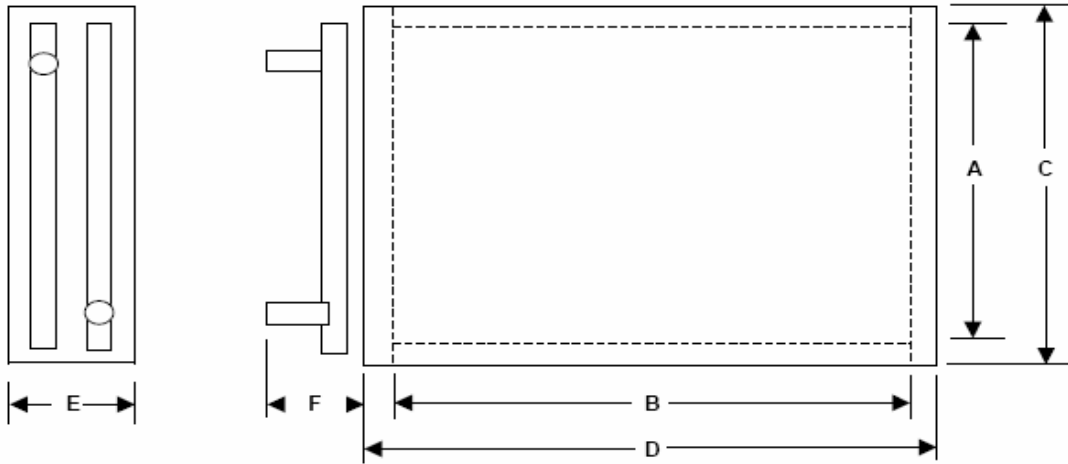

Model Number (includes # of Rows)	Face Area Sq-Ft	Finned Surface Area		Overall Frame Size		Frame Width E	Stub Out Length F	Header O.D. Sweat	Performance Based on 65°F EAT, 180°F EWT			
		A	B	C	D				GPM	CFM	BTU's	APD
CCDC2030-3	4.17	20	30	22	32	3 3/4	5 1/4	1 1/8	10	1800	133,095	0.16
										2000	141,357	0.19
										2200	148,937	0.23
CCDC2036-3	5.00	20	36	22	38	3 3/4	5 1/4	1 1/8	10	2400	166,012	0.19
										2600	173,217	0.22
										2800	179,922	0.25
CCDC2048-3	6.67	20	48	22	50	3 3/4	5 1/4	1 1/8	10	3200	211,866	0.19
										3400	218,339	0.21
										3600	224,425	0.24
CCDC2525-3	4.34	25	25	27	27	3 3/4	5 1/4	1 1/8	10	2000	139,426	0.18
										2200	146,737	0.21
										2400	153,465	0.25
CCDC3048-3	10.00	30	48	32	50	3 3/4	5 1/4	1 1/8	10	5200	276,952	0.19
										5400	289,997	0.24
										5600	294,009	0.25
CCDC1215-4	1.30	12.5	15	14.5	17	4 7/8	4 1/2	7/8	8	200	22,642	0.03
										300	32,054	0.07
										400	40,398	0.11
CCDC1520-4	2.08	15	20	17	22	4 7/8	4 1/2	7/8	8	600	60,014	0.10
										700	67,331	0.13
										800	74,080	0.17
CCDC2020-4	2.78	20	20	22	22	4 7/8	4 1/2	7/8	8	900	84,276	0.12
										1000	90,595	0.15
										1100	96,491	0.18
CCDC2025-4	3.47	20	25	22	27	4 7/8	4 1/2	7/8	10	1000	98,377	0.10
										1100	105,475	0.12
										1200	112,197	0.14
CCDC2030-4	4.17	20	30	22	32	4 7/8	5 1/4	1 1/8	10	1000	101,923	0.07
										1100	109,561	0.09
										1200	116,825	0.10
CCDC2036-4	5.00	20	36	22	38	4 7/8	5 1/4	1 1/8	10	1700	155,193	0.14
										1800	161,174	0.15
										1900	166,908	0.17

Summit Hot Water Duct Coils

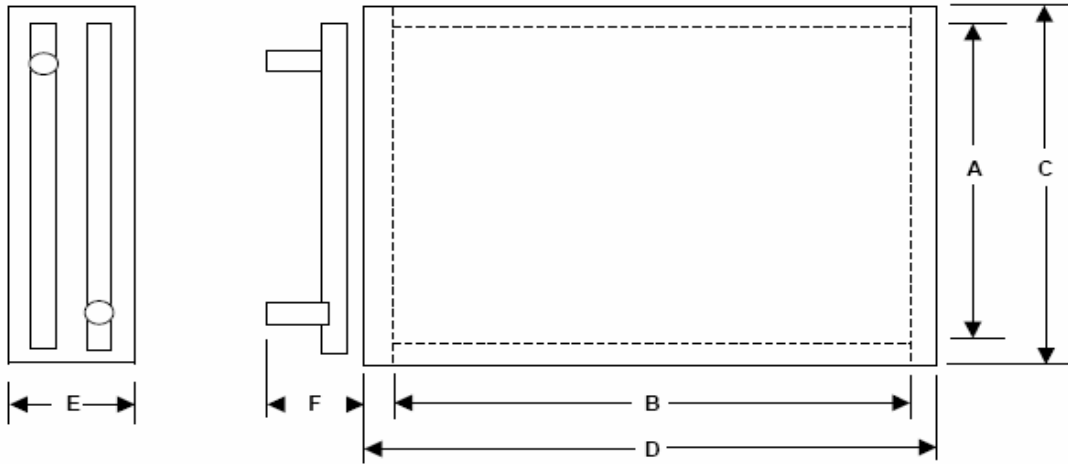

Model Number (includes # of Rows)	Face Area Sq-Ft	Finned Surface Area		Overall Frame Size		Frame Width E	Stub Out Length F	Header O.D. Sweat	Performance Based on 65°F EAT, 180°F EWT			
		A	B	C	D				GPM	CFM	BTU's	APD
CCDC2048-4	6.67	20	48	22	50	4 7/8	5 1/4	1 1/8	10	2300	202,029	0.14
										2400	207,424	0.15
										2500	212,631	0.16
CCDC2525-4	4.34	25	25	27	27	4 7/8	5 1/4	1 1/8	10	1400	129,280	0.12
										1500	141,216	0.16
										1600	141,273	0.18
CCDC3048-4	10.00	30	48	32	50	4 7/8	5 1/4	1 1/8	10	3400	270,025	0.14
										3600	278,131	0.15
										3800	285,746	0.17
CCDC2324-2	3.96	23.75	24	25.75	26	3 3/4	5 1/4	1 1/8	18	2000	123,213	0.14
										2100	126,644	0.15
										2200	129,954	0.17
										2300	133,148	0.18
CCDC2336-2	5.94	23.75	36	25.75	38	3 3/4	5 1/4	1 1/8	18	2400	136,238	0.20
										3200	166,034	0.11
										3400	173,166	0.12
										3500	179,924	0.14
CCDC2348-2	7.92	23.75	48	25.75	50	3 3/4	5 1/4	1 1/8	20	3600	186,330	0.16
										3700	192,419	0.18
										4500	225,090	0.12
										4600	231,980	0.13
CCDC3048-2	10.00	30	48	32	50	3 3/4	5 1/4	1 1/8	24	4700	238,595	0.14
										4800	251,052	0.17
										4900	262,603	0.20
										4800	290,143	0.13
CCDC3054-2	11.25	30	54	32	56	3 3/4	5 1/4	1 1/8	24	5000	296,637	0.14
										5200	302,930	0.15
										5600	314,919	0.17
										5800	320,511	0.19
CCDC3054-2	11.25	30	54	32	56	3 3/4	5 1/4	1 1/8	24	5200	315,886	0.12
										5600	328,730	0.14
										6000	340,821	0.16
										6400	352,247	0.18
									6800	363,069	0.20	